

## MEMBRANE ELEMENT

## PMNF1-4040LF


Low Energy & Low Pressure Drop

### SPECIFICATIONS

Nominal Membrane Area:	85 sq.ft
Permeate Flow:	1,900 gpd (7.1 m <sup>3</sup> /d)
NaCl Rejection:	> 85%
MgSO <sub>4</sub> Rejection:	99%
Membrane Polymer:	Polyamide Thin-Film Composite
Feed Spacer thickness:	34 mil (0.864mm)

The stated performance is based on the following conditions:

500 ppm NaCl, 2000 ppm MgSO<sub>4</sub>  
 70 psi (0.48 MPa) Applied Pressure  
 77 °F (25 °C) Operating Temperature  
 15% Permeate Recovery  
 pH 7.5

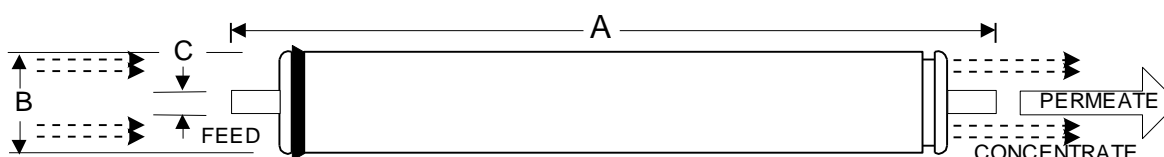

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	3.9 (99)	0.75 (19)	8 (3.6)

### OPERATING DATA

Maximum Applied Pressure:	600 psig (4.16 MPa)
Free Chlorine Tolerance:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
Continuous pH Range (Cleaning):	2.5 – 10.5 (2 - 12)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	16 gpm (3.6 m <sup>3</sup> /h)
Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1
Maximum Pressure Drop:	15 psi

#### NOTICE:

PERMEATE FLOW FOR AN INDIVIDUAL ELEMENT MAY VARY + OR - 15 PERCENT. ALL MEMBRANE ELEMENTS HAVE A BRINE SEAL, INTERCONNECTOR, AND O-RINGS IN A SEALED POLYETHYLENE PLASTIC BAG. USE GLYCERIN OR SILICON ONLY FOR LUBRICATION OF SEALS AND O-RINGS. ALWAYS AVOID STATIC PERMEATE BACKPRESSURE. WE OFFER DATA IN GOOD FAITH BUT WITHOUT GUARANTEE. PLEASE REFER TO THE APPLICATION INFORMATION LITERATURE ENTITLED OPERATION GUIDELINES FOR MORE INFORMATION BEFORE INSTALLING AND OPERATING THE ELEMENTS.