




	5 Module – 316SS Skid		
Module Name	PMMBR-75	PMMBR-110	PMMBR-150
Skid Surface Area (m <sup>2</sup> ) [ft <sup>2</sup> ]	75 [807]	110 [1,184]	150 [1,614]
Flowrate municipal applications* m <sup>3</sup> /day [gpm]	41 [8]	59 [11]	81 [15]
Flowrate industrial applications* m <sup>3</sup> /day [gpm]	29 [5]	43 [8]	58 [11]
L (mm) [inches]	495 [20]	495 [20]	495 [20]
W (mm) [inches]	640 [25]	640 [25]	640 [25]
H** (mm) [inches]	1,440 [57]	1,940 [76]	2,440 [96]
Filtrate Connection* (DN-mm) [inches]	DN40 [1-1/2"]	DN40 [1-1/2"]	DN50 [2"]
Air Connection* (DN-mm) [inches]	DN40 [1-1/2"]	DN40 [1-1/2"]	DN40 [1-1/2"]
Max. Shipping Weight*** kg [lbs]	150 [331]	180 [397]	210 [463]
Lifting Weight**** kg [lbs]	200 [441]	240 [529]	300 [661]

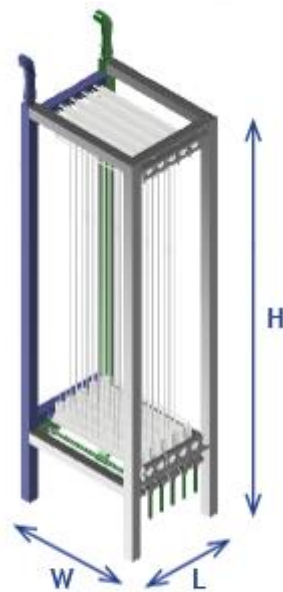

**5 Module Skid**

These are general descriptions and performance information. For additional operating information, storage instructions, and warranty terms, please contact Persalt Membranes for more details.